

CO-EX  
CORPORATION



# PROFILES AND ACCESSORIES


**CO-EX**  
CORPORATION

Call today  
for more information!  
**(800) 888-5364**

## U-SHAPED POLYCARBONATE PROFILES

The U-shaped profile is used to close the cut side of MACROLUX® polycarbonate sheets. They are not a substitute for the application of aluminium foil, but they protect the foil from water leaching.


Cod.	Thickness			
	6mm	10mm	16mm	20mm
	<b>M633</b>	<b>M634</b>	<b>M635</b>	<b>M640</b>
<b>a</b>	.748" (19mm)	.945" (24mm)	1.18" (30mm)	1.18" (30mm)
<b>b</b>	.984" (25mm)	1.14" (29mm)	1.34" (34mm)	1.38" (35mm)
<b>c</b>	.335" (8,5mm)	.492" (12,5mm)	.728" (18,5mm)	.886" (22,5mm)
<b>d</b>	.256" (6,5mm)	.413" (10,5mm)	.649" (16,5mm)	.807" (20,5mm)
Availability	•	•	•	*
Standard packing nr.	100	50	50	50
Length	12' (2100mm)	12' (2100mm)	12' (2100mm)	12' (2100mm)

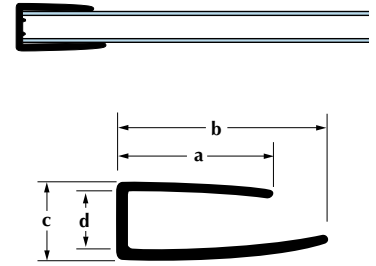

## H-SHAPED POLYCARBONATE PROFILES

H-shaped polycarbonate profiles are specifically made to coordinate with various sheet thicknesses and have UV protection on the external side. They are used to join two MACROLUX® sheets. They should not, be used as a weight-supporting structure, and are not guaranteed as watertight in a covering. They must be considered solely as a means for joining sheets.


Cod.	Thickness		
	6mm	8 - 10mm	16mm
	<b>M430</b>	<b>M431</b>	<b>M432</b>
<b>a</b>	2.28" (58mm)	2.44" (62mm)	2.83" (72mm)
<b>b</b>	2.83" (72mm)	2.98" (75,6mm)	3.31" (84mm)
<b>c</b>	.374" (9,5mm)	.531" (13,5mm)	.787" (20mm)
<b>d</b>	.276" (7mm)	.413" (10,5mm)	.670" (17mm)
<b>e</b>	472" (12mm)	.453" (11,5mm)	.610" (15,5mm)
Availability	•	•	•
Standard packing nr.	20	20	10
Length	24' (6000mm)	24' (6000mm)	24' (6000mm)

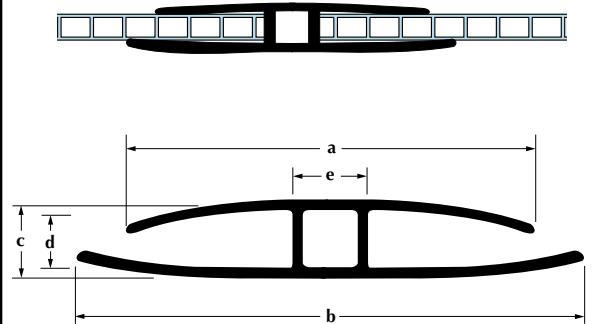

## POLYCARBONATE SNAP PROFILE (SNAP)

The polycarbonate snap profile (which has UV protection on the external side) makes joining MACROLUX® multiwall sheets a snap. Simply apply pressure on the top profile. The polycarbonate profile is not structural and is not guaranteed as watertight.


Cod.	Thickness 6 - 10mm		
	<b>M439</b>		
<b>a</b>	<b>a*</b>	2.28" (58mm)	2.24" (57mm)
<b>b</b>	<b>b*</b>	.728" (18,5mm)	.670" (17mm)
<b>c</b>	<b>c*</b>	.830" (21mm)	.906" (23mm)
<b>d</b>	<b>d*</b>	.138" (3,5mm)	.098" (2,5mm)
Availability		*	*
Standard packing nr.		10+10	10+10
Length		24' (6000mm)	24' (6000mm)

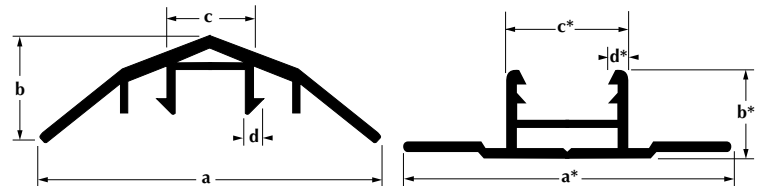

## RIDGE PROFILES FOR SHEETS

The polycarbonate ridge profiles have a UV protection on the external side and they are used to join two MACROLUX® sheets at a ridge. The sheets must have the thickness detailed for each profile. They should not be used as weight-supporting structures but must be considered solely for sheet joining. The special shape of the profiles permits the formation of 90° corners.

Cod.	Thickness	
	6mm	8-10mm
	<b>M448</b>	<b>M449</b>
<b>a</b>	5.75" (146mm)	5.83" (148mm)
<b>b</b>	.236" (6mm)	.394" (10mm)
Standard packing nr.	10	10
Length	24' (6000mm)	24' (6000mm)

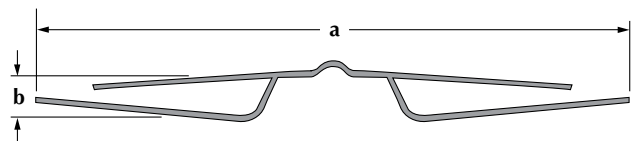

- Available
- \* Available upon request

CALL TODAY FOR MORE INFORMATION! (800) 888-5364

DISTRIBUTED BY:



5 Alexander Dr., Wallingford, CT 06492  
 TEL: (203) 679-0500 • (800) 888-5364  
 FAX: (203) 679-0600 • E-MAIL: info@co-excorp.com  
 WEB SITE: co-excorp.com