


**No Special Hardware Required - Installs in a Snap!**

**CLICK 16**

**Do It Yourself Polycarbonate Panels**

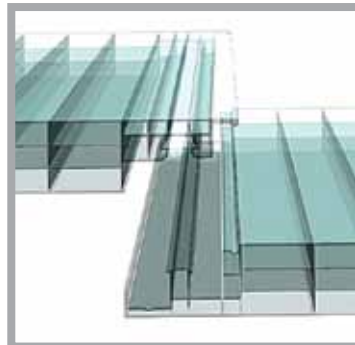


**CO-EX**  
CORPORATION

# CLICK 16 System of Polycarbonate Panels

- Easy Handling - 9" Panels fit in cars - Light in weight
- Quick Assembly - Installs in a Snap!
- High Light Transmission with UV protection
- Thermally Efficient 4-wall construction
- Strong - Resistant to impact
- Waterproof

*Ideal for glazing and roofing in Patios, Greenhouses, Carports, Pool Enclosures, Penthouses, Office Partitions and more, Click 16 is the perfect product for the do-it-yourselfer.*

The assembly is so simple that CLICK 16 can easily be installed with **standard** tools. Cut panels to desired length, tape edges to seal, screw in place, snap in next panel and repeat.

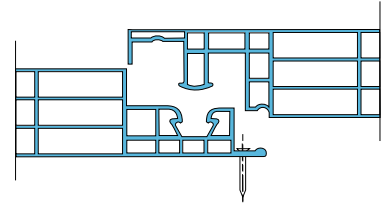


It's 4 wall construction is thermally efficient yet it offers high light transmission. Acting like a sunblock, it is opaque to UV rays, protecting patio furniture, vehicles, etc. from the harmful effects of the sun.

## ASSEMBLY




1. Cut to the needed size and seal the edges of CLICK 16 with adhesive aluminum tape.

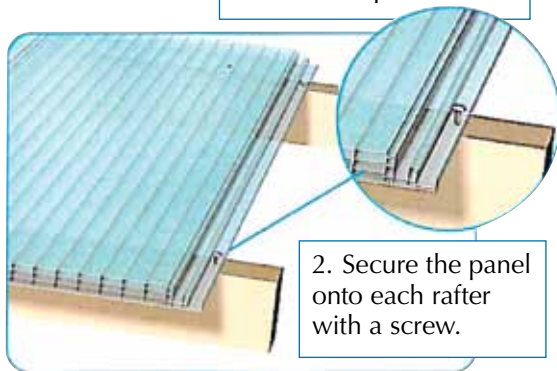

2. Secure the panel onto each rafter with a screw.



3. Match the sheet edges carefully and press into place with a "click."

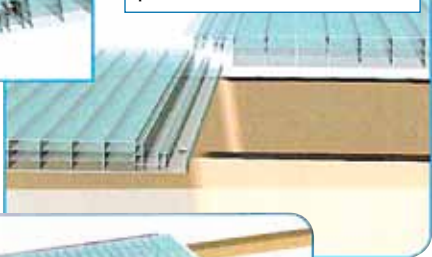


4. Apply a border of aluminum or steel, or use our 16mm U-Channel to finish the edges.

## TECHNICAL DATA

COMPONENT	DATA
Maximum Length	39 ft.
Width	9.84 inch
Pitch	0.63 inch
Weight	0.50 lb/ft <sup>2</sup>
Thermal Insulation	0.37 Btu/ft <sup>2</sup> H °F
Light Transmission	Clear - 80% Bronze - 70% Opal - 70%
Standard Colors	Clear, Bronze, Opal
Minimum Slope	5%

## LOADING DATA

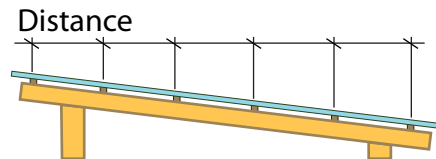

LOAD	DISTANCE
12.53 lbf/ft <sup>2</sup>	3' 11-1/4"
18.80 lbf/ft <sup>2</sup>	3' 3-3/8"
25.06 lbf/ft <sup>2</sup>	2' 7-1/2"

**CALL TODAY FOR MORE INFORMATION**

The information contained in this flyer has been drafted on the basis of our best knowledge. CO-EX reserves the right to change specifications and data, without notice, if deemed necessary in the evolution of its products. It is the sole responsibility of the customer to confirm with their own architect, engineer or other professional consultants that the materials offered for sale meet the requirements and specifications of the particular project and use for which they are being purchased. The products having a weight lower than the standard reported herein are not covered by any guarantee.

**Call today for more information! (800) 888-5364**